


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>H01B 1/12</b>	<b>A1</b>	(11) International Publication Number: <b>WO 96/17359</b> (43) International Publication Date: <b>6 June 1996 (06.06.96)</b>
(21) International Application Number: <b>PCT/DK95/00484</b> (22) International Filing Date: <b>30 November 1995 (30.11.95)</b> (30) Priority Data: <b>1370/94</b> <b>1 December 1994 (01.12.94)</b> <b>DK</b> (71) Applicant (for all designated States except US): <b>DANACELL APS [DK/DK]; Vedbæk Strandvej 377, DK-2950 Vedbæk (DK).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>ROSENMEIER, Lars [DK/DK]; Vedbæk Strandvej 377, DK-2950 Vedbæk (DK). KNUZ, Boye, Cornils [DK/DK]; Randersgade 11, 2.th., DK-2100 Copenhagen Ø (DK).</b> (74) Agent: <b>PLOUGMANN, VINGTOFT &amp; PARTNERS A/S; Sankt Annæ Plads 11, P.O. Box 3007, DK-1021 Copenhagen K (DK).</b>	(81) Designated States: <b>AL, AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).</b>  Published With international search report.	


(54) Title: ION-CONDUCTIVE POLYMERS



(Ia)



(Ib)



(Ic)

## (57) Abstract

Ion-conductive polymers with high ion conductivity and containing covalently bound ion complexes of one of formulas (Ia-Ic), wherein  $M^+$  is  $H^+$ ,  $Li^+$ ,  $Na^+$ , or  $K^+$ ;  $m$  is an integer in the range 0-4;  $m'$  is an integer in the range 0-7;  $m''$  is an integer in the range 0-8; and each  $R$  independently is halogen;  $-CO-O^-$ ,  $-CO-O^-M^+$ , or  $-SO_2-O^-M^+$ ; cyano; nitro;  $C_{1-5}$  alkoxy; optionally substituted phenyl or phenoxy;  $-CONR^5R^6$  or  $-NR^5R^6$  where  $R^5$  and  $R^6$  independently are hydrogen,  $C_{1-5}$  alkyl, optionally substituted phenyl, phenylcarbonyl, or  $C_{1-6}$  alkanoyl;  $-N(R^5)-CO-R^7$  where  $R^7$  is hydrogen,  $C_{1-5}$  alkyl,  $C_{2-5}$  alkenyl,  $C_{2-5}$  alkynyl, or optionally substituted phenyl;  $R^7-CO-$ ,  $R^7-O-CO-$ ,  $R^7-CO-O-$ , or  $R^7-O-CO-O-$ ; cycloheptatrienyl; or one of the groups  $R$  is a ion complex of the type Ia, Ib, or Ic with the proviso that  $R$  cannot be a further ion complex of the type Ia, Ib, or Ic; or two groups  $R$  bound to two adjacent carbon together form a divalent aliphatic or alicyclic group with 3-8 carbon atoms and having at least 2 C-C double bonds,  $-CO-O-CO-$ ,  $-CO-S-CO-$ , or  $-CO-N(R^7)-CO-$ ; and the free bond "a", either directly or through an intervening group, is bound to the polymer backbone.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CJ	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## ION-CONDUCTIVE POLYMERS

### FIELD OF THE INVENTION

The present invention concerns ion-conductive polymers which are useful as electrolytes in electrochemical devices such as rechargeable batteries and fuel cells.

### BACKGROUND OF THE INVENTION

The production, storage, and distribution of energy are among the main concerns of modern industry and society. Thus, the efficient exploitation of energy sources that generate electricity on an intermittent basis, e.g. solar energy, wind and wave power, require the availability of low-cost, high-efficiency electricity storage systems. Similarly, the increasingly widespread use of various portable electronic devices and appliances having fairly high power requirements, such as mobile telephones, portable music and video systems (compact cassette recorders/players, CD-players, video camcorders etc.), laptop computers and the like, has increased the number of rechargeable battery units in use by a significant factor. Finally, the desire to reduce urban air pollution has resulted in the development of electric automobile systems that have highlighted the shortcomings of existing battery systems with respect to price, power-to-weight ratio, and/or environmental concerns due to use of environmentally problematic materials such as heavy metals.

There have been a number of attempts at using ion-conductive polymers as electrolytes in batteries, i.e. in connection with the use of alkali metals as electrode material combined with the corresponding alkali metal cation as the charge carrier through the electrolyte. Lithium in particular is attractive for high-density batteries due to its low specific density, high standard potential and high melting point. Such attempts include the use of alkali metal salts such as  $\text{LiClO}_4$  solvated in a poly(alkylene oxide) matrix and the use of

covalently bound ion-polymer complexes such as phenolate derivatives covalently bound to a poly(methyl hydrosiloxane) backbone.

In the case of solvated salt, the stability of the alkali metal electrode is believed to depend on the formation of a passivation layer which is due to an irreversible chemical reaction between the counter anion and the alkali metal electrode. However, despite relatively high ion conductivities of such electrolytes, the passivation phenomenon seriously limits the lifetime of the battery.


The passivation problem may be solved partially by covalently binding the anions to the backbone as has been done with the use of phenolates. However, although the anions are immobilized on the polymer matrix, these attempts have not resulted in electrolytes with ion conductivities of practically useful magnitude due to low dissociation constant of the lithium/-phenolate ion pair and/or to the use of systems of inferior ion-solvating properties.

Consequently, there is a need for ion-conductive polymers that are stable in contact with the electrode materials and have ion conductivities of a magnitude that makes them practically applicable as electrolytes for inclusion into batteries or fuel cells.


#### SUMMARY OF THE INVENTION

It has now been found that surprisingly high ion conductivities can be obtained by means of polymers containing ion complexes comprising covalently bound carbocyclic anionic groups, the anion groups being aromatic and having been rendered aromatic as a result of the anion formation through the removal of at least one  $H^+$  ion. The aromatic, carbocyclic anionic groups may be substituted by various groups including electron-withdrawing groups.


In particular, the invention concerns an ion-conductive polymer containing covalently bound ion complexes of one of the formulas Ia-Ic



Ia



Ib



Ic

5 wherein

$M^+$  is  $H^+$ ,  $Li^+$ ,  $Na^+$ , or  $K^+$ ;

$m$  is an integer in the range 0-4;

$m'$  is an integer in the range 0-7;

$m''$  is an integer in the range 0-8; and

10 each group R independently is

halogen;

a group  $-CO-O^-$ ,  $-CO-O^-, M^+$ , or  $-SO_2-O^-, M^+$  wherein  $M^+$  is as defined above;

cyano;

15 nitro;

$C_{1-5}$  alkoxy;

optionally substituted phenyl;

optionally substituted phenoxy;


20 a group  $-CONR^5R^6$  where  $R^5$  and  $R^6$  independently are hydrogen,  $C_{1-5}$  alkyl, optionally substituted phenyl, phenylcarbonyl, or  $C_{1-6}$  alkanoyl;

a group  $-NR^5R^6$  where  $R^5$  and  $R^6$  independently are as defined above;

25 a group  $-N(R^5)-CO-R^7$  where  $R^5$  is as defined above, and  $R^7$  is hydrogen,  $C_{1-5}$  alkyl,  $C_{2-5}$  alkenyl,  $C_{2-5}$  alkynyl, or optionally substituted phenyl;

a group  $R^7$ -CO-, a group  $R^7$ -O-CO-, a group  $R^7$ -CO-O-,  
or a group  $R^7$ -O-CO-O- where  $R^7$  is as defined above;  
cycloheptatrienyl; or

one of the groups R is a ion complex Ia', Ib', or Ic'

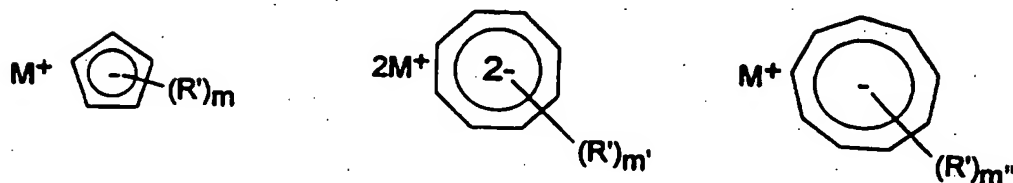

5

Ia'

Ib'

Ic'

wherein  $M^+$ , m, m' and m'' are as defined above, and  $R'$   
has the same meanings as R defined above with the  
proviso that  $R'$  is not a ion complex Ia', Ib', or  
Ic';

10

or two groups R bound to two adjacent carbon atoms  
may together form

a divalent aliphatic or alicyclic group with 3-8  
carbon atoms and having at least 2 C-C double  
bonds;

15

carbonyloxycarbonyl;

carbonylthiocarbonyl; or

a group -CO-N( $R^7$ )-CO- where  $R^7$  is as defined  
above;

and the free bond indicated by "a", either directly or  
through an intervening group, is bound to the polymer  
backbone.

## DETAILED DESCRIPTION OF THE INVENTION


In the present context, the term "C<sub>1-5</sub> alkyl" designates an alkyl moiety of 1-5 carbon atoms such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, 5 n-pentyl, or neopentyl. The term "C<sub>2-5</sub> alkenyl" designates a monounsaturated hydrocarbyl group with 2-5 carbon atoms, such as vinyl, allyl, 1-, 2-, or 3-propenyl, n-butenyl, sec-butenyl, iso-butenyl, n-pentenyl, sec-pentenyl, iso-pentenyl. The term "C<sub>2-5</sub> alkynyl" designates a hydrocarbyl group with 10 2-5 carbon atoms and containing a triple bond, such as ethynyl, propynyl, n-butyryl, sec-butyryl, iso-butyryl, n-pentyryl, iso-pentyryl. The term "C<sub>1-5</sub> alkoxy" designates a C<sub>1-5</sub> alkyl group as defined bound via an oxygen atom. The term "C<sub>1-6</sub> alkanoyl" designates the acyl group derived from 15 an alkanic acid with 1-6 carbon atoms, such as formyl, acetyl, propionyl, butyryl, valeryl or hexanoyl.

The term "halogen" designates fluoro, chloro, bromo, and iodo.


The terms "optionally substituted phenyl" and "optionally 20 substituted phenoxy" designate phenyl and phenoxy groups, respectively, which are unsubstituted or are substituted with electron-withdrawing groups such as halogen, cyano, nitro, C<sub>1-5</sub> alkoxy, a group -CONR<sup>5</sup>R<sup>6</sup> as defined above, a group -NR<sup>5</sup>R<sup>6</sup>, as defined above, a group -N(R<sup>5</sup>)-CO-R<sup>7</sup> as defined 25 above, a group R<sup>7</sup>-CO- as defined above, a group R<sup>7</sup>-O-CO- as defined above, a group R<sup>7</sup>-CO-O- as defined above, or a group R<sup>7</sup>-O-CO-O- as defined above.

When two groups R bound are to two adjacent carbon atoms and together form a divalent aliphatic or alicyclic group, 30 examples of such divalent groups are 1,3-propenylene, 1- or 2-buten-1,4-ylene, 1,3-butadien-1,4-ylene, 1,3-pentadien-1,5-ylene, 5-methyl-1,3-pentadien-1,5-ylene, 3-methyl-1,4-penta-

dien-1,5-ylene, 5-methylidene-1,3-pentadien-1,5-ylene, a group of the formula



and a group of the formula




where "a" indicates the free bonds.

- 5 Specific, but not limiting examples of covalently bound ion complexes of the formulas Ia-Ic wherein two groups R bound to adjacent carbon atoms form the above defined groups are as



follows:

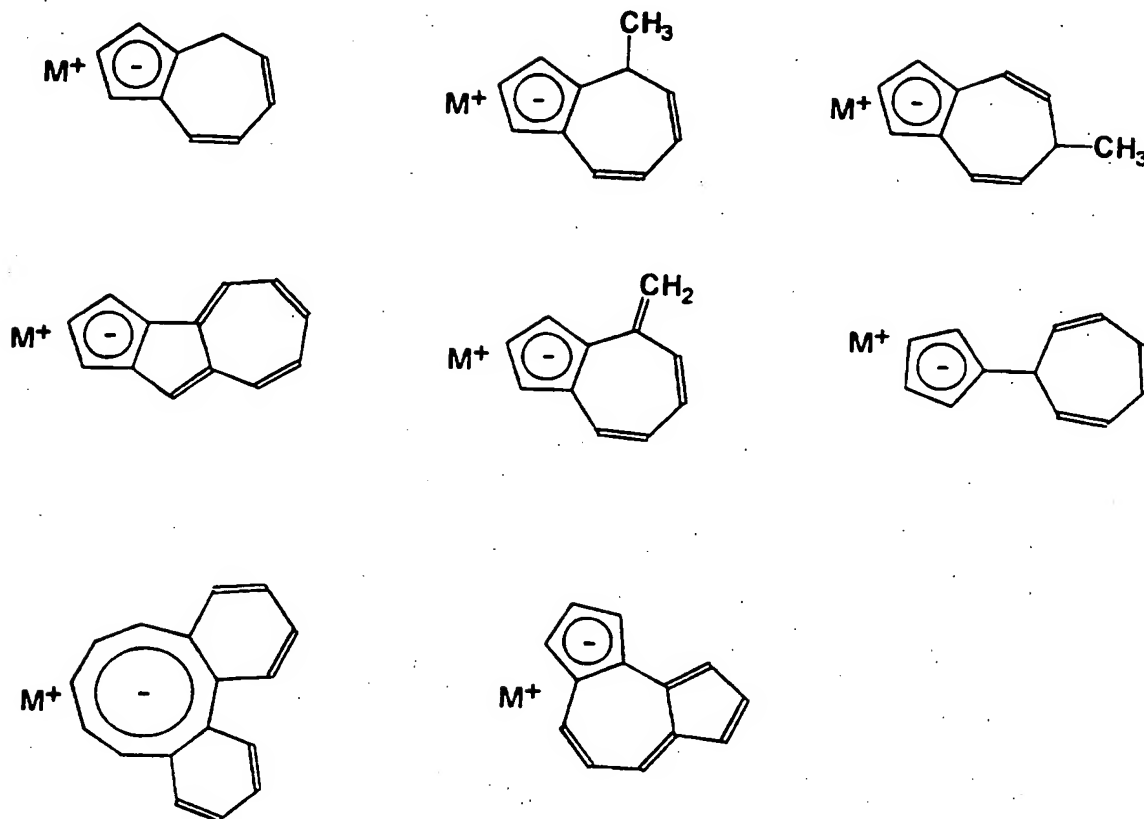

where the free bond "a" shown in the formulas Ia-Ic may be in any of the possible positions.

It is particularly preferred if the divalent group together  
 5 with the cyclic nucleus in the formulas Ia-Ic forms a complete aromatic structure.

Preferred examples of the covalently bound anion in the ion  
 complexes of the formulas Ia-Ic are the cyclopentadienylide  
 ion, the indenylide ion, and the 9-fluorenylde ion, in  
 10 particular the cyclopentadienylide ion.

Since the ion conductivity of an ion conductive polymer is unfavourably affected at temperatures below the glass transition temperature of the polymer due to crystallization of the ion-solvating polymer matrix, it is preferred that the

glass transition temperature  $T_g$  of the polymer of the invention is below 273°K, more preferably below 263°K, most preferably below 253°K, in particular below 243°K, especially below 233°K, such as below 223°K.

- 5 It has been established that a prerequisite for ion-conductivity is the presence of a suitably ion-solvating environment capable of solvating the ions, and in order to ensure such an environment, an ion solvating solvent may be incorporated into the electrolyte, e.g. tetrahydrofuran or propylene carbonate.

However, it is known that the ion conductivity is also improved in the presence of poly(alkylene oxide) moieties in the polymer, and it is therefore preferred that such moieties are present in the polymer. It is particularly preferred that the polymer of the invention comprises sequences of the formula  $-(CH(Y)-CH_2-O)_n-$  where Y is hydrogen or methyl, and n is an integer in the range of 2-30 depending on the polymeric system selected, in particular in the range 3-10. Such sequences may be present either in the backbone of the polymer or in grafted side groups or in the intervening group. It has been shown that poly(alkylene oxide)s form canal-like structures in the polymeric matrix with the right dimensions for ion passage through the electrolyte.

Depending on the precise composition of the poly(alkylene oxide) moieties in the polymer, they may affect the  $T_g$  of the polymer due to the formation of crystalline domains amongst the poly(alkylene oxide) moieties present. While it has been found that such effects can be off-set by forming the electrolyte from a mixture of a polymer of the invention with for example polyisobutylene, it is also contemplated that the effect may be eliminated or substantially reduced by omitting forming the poly(alkylene oxide) moieties from identical units, thereby introducing an element of heterogeneity in the poly(alkylene oxide) moieties.

Since it is chiefly the properties of the ion complexes of the formulas Ia-Ic which are responsible for the surprising ion conductivity properties of the polymers of the invention, the backbone in the polymers may in principle be any type of polymer which does not actually contain functionalities which would directly counteract the intended ion transport process such as groups or functionalities capable of binding strongly with  $M^+$ .

Examples, although by no means exhaustive, of general types of polymers which may form the basis for at least part of the backbone of the polymers of the invention are derivatives of polyolefines such as polyethylene, polypropylene or polyisobutylene; polymers of unsaturated acids such as acrylic acid, methacrylic acid, itaconic acid as well as derivatives of such acids such as esters, nitriles or amides, e.g. polyacrylic acid, poly(polyethoxymethylitaconate) (PEO(n)MI), poly(polyethyleneglycol methacrylate) (PGM), poly(hydroxyethyl acrylate); polyvinyl alcohol and derivatives thereof such as polyvinyl esters, e.g. polyvinyl acetate; derivatives of polyesters, typically formed from a diacid (e.g. adipic acid, terephthalic acid) and a dihydroxy compound (e.g. ethylene glycol, propylene glycol), such as poly(ethylene adipate); derivatives of polyamides, typically formed from a diacid (e.g. adipic acid, terephthalic acid) and a diamino compound (e.g. 1,3-diaminopropane, 1,4-diaminobutane, 1,6-diaminohexane); polyalkyleneimines, both linear and branched, such as polyethyleneimine; substituted polyphosphazenes such as poly(bis-(methoxy-ethoxy-ethoxide)phosphazene); silicone polymer derivatives such as polysiloxane derivatives, e.g. derivatives of poly(methylhydrosiloxane).

Furthermore, the polymer may be either crosslinked or non-crosslinked, and the crosslinking may have been brought about in any manner known in the art, e.g. through reaction of reactive groups on the backbone or a grafted side group thereon with crosslinking moieties having two or more functionalities; or through irradiation with ultraviolet

light (optionally in the presence of UV-sensitive initiators such as benzophenone or benzoylperoxide), X-rays, gamma rays or electron beams (EB).

The term "intervening group" is intended to mean any chemical moiety located between on the one hand the ion complexes of the formulas Ia-Ic defined above and on the other hand the polymer backbone. Since, as discussed above, it is the properties of the ion complexes of the formulas Ia-Ic which are chiefly responsible for ion conductivity properties of the polymers, it is clear that similar to the polymer backbone, the intervening group may in principle be any type of divalent chemical group or moiety which does not actually contain functionalities which would directly counteract the intended ion transport process.

As examples, but by no means exhaustive, of intervening groups may be mentioned the following where the lefthand end of the various formulas is connected to the polymer backbone, and the righthand end is connected to the ion complex of the formulas Ia-Ic:


- (CH<sub>2</sub>)<sub>x</sub>- where x is an integer from 1 to 10;
- (CH<sub>2</sub>)<sub>x'</sub>-(Phenyl)-, where x' is an integer from 1 to 10;
- O-;
- O-(Phenyl)-;
- O-(CH<sub>2</sub>)<sub>x''</sub>-, where x'' is an integer from 1 to 10;
- O-(CH<sub>2</sub>)<sub>x'</sub>-(Phenyl)-, where x' is as defined above; and
- (CH<sub>2</sub>)<sub>y</sub>-O-CH<sub>2</sub>-CH(OH)-CH<sub>2</sub>-, where y is an integer from 1 to 10.

In the above formulas, the group (Phenyl) designates a benzene ring, the substitution pattern of which may be 1,2-, 1,3-, or 1,4-, and the remaining positions on the ring are unsubstituted or may be substituted with any group capable of delocalizing the charge of the anion, e.g. cyano; nitro; C<sub>1-5</sub> alkoxy; optionally substituted phenyl; optionally substituted phenoxy; a group -CONR<sup>5</sup>R<sup>6</sup> where R<sup>5</sup> and R<sup>6</sup> independently are


hydrogen, C<sub>1-5</sub> alkyl, optionally substituted phenyl, phenyl-carbonyl, or C<sub>1-6</sub> alkanoyl; a group -NR<sup>5</sup>R<sup>6</sup> where R<sup>5</sup> and R<sup>6</sup> independently are as defined above; a group -N(R<sup>5</sup>)-CO-R<sup>7</sup> where R<sup>5</sup> is as defined above, and R<sup>7</sup> is hydrogen, C<sub>1-5</sub> alkyl, C<sub>2-5</sub> alkenyl, C<sub>2-5</sub> alkynyl, or optionally substituted phenyl; a group R<sup>7</sup>-CO-, a group R<sup>7</sup>-O-CO-, a group R<sup>7</sup>-CO-O-, or a group R<sup>7</sup>-O-CO-O- where R<sup>7</sup> is as defined above.

In another embodiment of the polymer, sequences of the formula -(CH(Y)-CH<sub>2</sub>-O)<sub>n</sub>- discussed above are comprised in the intervening groups between the ion complexes of the formulas Ia-Ic and the polymer backbone.


The backbone of the polymer may be one which is derived from one of the following examples of polymers which, however, should not be construed as being limiting. In the examples, the basic structure of the polymer is given by showing the repeating units, but without showing where the location of the ion complex group of the formula Ia-Ic or the group containing the ion complex group. Thus, the backbone may be derived from polymer backbones of the following formulas II, III or IV



II



III



IV

wherein X is halogen;  $R^{10}$  and  $R^{11}$  independently are hydrogen, alkyl with 1-3 carbon atoms, carboxy, carboxyalkyl with 1-3 carbon atoms, phenyl, a group  $-(OCH(Y)CH_2)_nOH$  or a group  $-(OCH(Y)CH_2)_nOR^{12}$  wherein Y is H or methyl, n is an integer in the range 2-30 and  $R^{12}$  is  $C_{1-3}$  alkyl; and y is an integer in the range from 3 to  $10^4$ , preferably from 3 to  $10^3$ , such as from 3 to 500.

In the formula II, it will typically be in the position of the silicon-bound hydrogen that an intervening group or an ion complex or, alternatively, a grafted side group is inserted as a result of the reactivity of the hydrogen-silicon bond. Likewise, in the formula III it will typically be in the position of the halogen atom that an intervening group or an ion complex or, alternatively, a grafted side group is inserted as a result of the reactivity of the phosphorous-halogen bond. In the formula IV, it will typically be somewhere in  $R^{10}$  and/or  $R^{11}$  that an intervening group or an ion complex or, alternatively, a grafted side group is inserted.

The polymers of the invention may typically be prepared from suitably substituted monomers by known methods of polymerisation analogous to the manner in which the type of polymer, from which a polymer of the invention is derived, is usually prepared. However, in some cases such as poly(ethylene glycol) ethers and poly(methyl siloxane)s, it may be more practical to introduce the ion complex groups or moieties containing them or grafted side groups into already existing polymers having suitable functionalities in their structure. As an example of a type of reagent capable of introducing an intervening group or a grafted side groups may be mentioned poly(ethylene glycol) allyl methyl diether, the double bond of which is able to react with the polymethylhydrosiloxane of formula II replacing the hydrogen in a hydrosilylation reaction.

When preparing the polymers of the invention from suitably modified monomers, the actual polymerization is typically performed in the same manner as known polymerizations relevant for the polymer in question, including the use of  
5 catalysts, coinitiators, solvents, proton traps, etc., cf. standard works in the polymer field such as M.P. Stevens, "Polymer Chemistry", Oxford University Press, 1990. Also, when the polymer contains poly(alkylene oxide) moieties, it may be advantageous to add an antioxidant, such as a steri-  
10 cally hindered phenol derivative, at the end of the polymerization reaction in order to prevent polymer degradation.

Similarly, the monomers may be modified by standard organic chemical methods as exemplified by the following.

Thus, the monomers for preparation of poly(vinyl ether)s  
15 (PVE) where the ether functions are of the poly(alkylene oxide) type, in particular the poly(ethylene oxide) type, may be for example synthesized from a mixture of ethyl vinyl ether and an appropriate poly(ethylene glycol)-monomethyl ether in the presence of mercuric acetate as a catalyst while  
20 heating the mixture at reflux temperature<sup>(15,16)</sup>. Ethylene glycol allyl vinyl diether for preparing allylated PVE may be prepared from allyl alcohol and (2-chloroethyl) vinyl ether, in the presence of a strong base such as potassium hydroxide, optionally in the presence of an aprotic solvent such as  
25 dimethyl sulfoxide (DMSO) at elevated temperatures, typically between 75°C and 85°C<sup>(15)</sup>.

Monomers which are esters of unsaturated acids with an alcohol, such as poly(alkylene oxide)s or phenols, are typically prepared by acid catalyzed esterification of the  
30 unsaturated acid, e.g. itaconic acid, with an appropriate poly(alkylene oxide) or derivative thereof such as a suitable poly(ethylene glycol) or poly(ethylene glycol)-monomethyl ether, or with an appropriate phenol, or with a mixture of these, in the presence of e.g. p-toluene sulfonic acid

catalyst in a solvent such as toluene at reflux temperature<sup>(17,18,19,20)</sup>.

When polymerizing the modified monomers, other unmodified, unsaturated co-monomers such as isobutylene or styrene may be included.

For the preparation of polymers of the poly(methyl siloxane) type shown above, a suitable starting material may be a poly(methyl hydrosiloxane) which may then be reacted with a poly(ethylene glycol) allyl methyl diether or with allyl glycid ether or with styrene or a mixture of these in the presence of platinum catalyst<sup>(2)</sup>. The poly(ethylene glycol) allyl methyl ether used as a starting material may be prepared by a reaction between allyl chloride and the sodium salt of an appropriate poly(ethylene glycol) monomethyl ether, optionally in an aprotic solvent such as tetrahydrofuran (THF) at temperatures between 40°C and 70°C<sup>(10)</sup>. Similarly, poly(ethylene glycol) monomethyl ether and phenols can be grafted on to poly(methyl hydrosiloxane) in the presence of zinc octoate as a catalyst<sup>(2)</sup>. These reactions may be carried out at room temperature, optionally in an aprotic solvent such as THF. However, the use of zinc octoate requires the extraction thereof from the resulting polymer by a modified Soxhlet process.

A poly(alkylene oxide) matrix may also be introduced by mixing a polymer of the invention containing the ion complex of the formulas Ia-Ic (e.g. of the poly(methyl siloxane) type) with 1) a copolymer of poly(ethylene glycol) methyl vinyl diether and ethylene glycol allyl vinyl diether; 2) poly(ethylene glycol)-crosslinked di-(poly(ethylene glycol) monomethyl ether)-polyphosphazene (DPP); or 3) poly(ethylene glycol)-crosslinked poly(di-poly(ethylene glycol) monomethyl ether) itaconate (PPI). Furthermore, any mixture of poly(ethylene glycol)-crosslinked DPP, poly(ethylene glycol)-crosslinked PPI and allylated PVE may serve the same purpose. In the case of allylated PVE, a crosslinking reaction occurs



between the Si-H-bond in poly(methyl hydrosiloxane) and the double bonds in allylated PVE copolymer.

DPP, poly(ethylene glycol)-crosslinked DPP or phenylated DPP may be prepared by means of the ring-opening reaction of  
5 dichlorophosphazene at temperatures in the range 240-260°C, followed by reaction with the sodium salt of poly(ethylene glycol) monomethyl ether, poly(ethylene glycol), phenol, or a mixture thereof in the presence of tetra-n-butyl ammonium bromide. The reactions may optionally be carried out in an  
10 aprotic solvent such as THF, at temperatures between 60°C and 80°C<sup>(7,8,9)</sup>.

Polymers of the PVE-type, the polyalkene (such as polyisobutylene (PIB)) type, the polystyrene type, or combinations thereof may be prepared by carbocationic polymerization  
15 methods. The relevant starting materials are, in a typical example of such a polymerization reaction, reacted in a 40/60 (v/v) methylcyclohexane/dichloromethane solvent system with an initiating complex of titanium(IV)chloride and 1,3-di-(2-methoxy-2-propyl)-5-tert-butylbenzene in the presence of a  
20 proton trap such as 2,6-di-tert-butylpyridine, and in another typical example polymerized in dichloromethane with BF<sub>3</sub>Et<sub>2</sub>O as the initiator at temperatures in the range from -70°C to -90°C<sup>(12,13,14,15,16)</sup>.

Polymerization of unsaturated acid ester monomers such as  
25 itaconic acid diester monomers may be effected at temperatures in the range of 50-60°C using  $\alpha,\alpha'$ -azobisisobutyronitril as a radical initiator<sup>(17,18,19,20)</sup>.

Polymers containing phenol- and/or styrene groups may furthermore be lithiated with alkyllithium (such as butyllithium (BuLi)) and then reacted with a suitable chemical  
30 compound for introducing a into the polymer precursor to the ion complex of the formulas Ia-Ic. One example of such a compound is 2-cyclopentene-1-on for introducing a cyclopentadienyl group onto the phenyl group. The ion complex is then

formed by reacting the precursor group on the polymer with a metallating agent, for example an alkylolithium (such as methyllithium (MeLi) or BuLi) which then results in the formation of a lithium cyclopentadienylide group  
5 complex<sup>(3,4,5,6)</sup>.

The ion-complex may also be introduced into the polymer either by adding a metal salt of the desired ion complex group to a polymer containing suitable functional groups with which to react; one example is the reaction between lithium  
10 cyclopentadienylide (LiCp) and an epoxy group on poly(methyl hydrosiloxane) carrying grafted allyl glycidyl ether groups.

Another aspect of the invention is a battery or a proton exchange membrane fuel cell comprising an electrolyte comprising a polymer of the invention. When a fuel cell is  
15 desired, a polymer in which  $M^+$  is  $H^+$  is used, whereas when  $M^+$  is  $Li^+$ ,  $Na^+$ , or  $K^+$ , the polymer is used in a battery. The polymers of the invention may also be used in other electrochemical devices such as electrochromic displays, "smart window" displays, electrochemical sensors, ion exchange  
20 matrixes (e.g. in desalination plants), galvanic cells, supercapacitors, and hydrogen concentration units.

A battery or a fuel cell according to the invention may be designed in a manner known per se to the person skilled in the art, e.g. as described in "Polymer Electrolyte Reviews"  
25 vol. 1 and 2, Ed. J.R. MacCallum & C.A. Vincent, Elsevier Applied Science, 1989; "Electrochemical Science and Technology of Polymers" vol. 2, Ed. R.G. Linford, Elsevier Applied Science, 1990; Fiona M. Gray, "Solid Polymer Electrolytes", VCH Publishers, 1991; and A.J. Appleby & F.R. Foulkes, "Fuel  
30 Cell Handbook", Van Nostrand, New York, 1989.

Thus, a typical example of a battery of the invention comprises a anode consisting of a sheet of nickel foil (serving as a current collector) laminated with a sheet of foil of the alkali metal in question, e.g. lithium foil with a thickness

of 40-100  $\mu\text{m}$ . The electrolyte is then laminated onto the alkali metal foil, the thickness of the polymeric electrolyte typically being the range 20-100  $\mu\text{m}$ .

Finally, a cathode is laminated onto the surface of the electrolyte opposite the anode laminate. In order to be able to accommodate the alkali metal atoms resulting from the transport across the electrolyte of alkali metal ions, the cathode typically comprises an intercalating material, such as  $\text{TiS}_2$ ,  $\text{V}_2\text{O}_5$ ,  $\text{V}_6\text{O}_{13}$ ,  $\text{MnO}_2$ ,  $\text{CoO}_2$ , the alkali metal atoms resulting from the ion transport intercalating in vacant positions in the crystal lattice of the cathode material when the ion accepts an electron. In order to provide the cathode with sufficient electrical conductivity, the intercalation material is typically mixed with particles of an electrically conductive, but electrochemically inert material such as carbon, e.g. graphite and coke, and further contains a portion of the ion-conductive polymer.

The thickness of the entire laminate of anode, electrolyte, and cathode will depend on several factors but is typically up to a maximum of 2 mm. To provide batteries of cylindrical shape, the above laminate may simply be provided with suitable insulating layers and electrical connections and rolled or folded into the appropriate shape, e.g. a cylinder, and placed in a suitable casing.


A typical example of a proton exchange membrane fuel cell according to the invention comprises a pair of teflon-coated carbon gas diffusion electrodes laminated onto both sides of a membrane of a proton-conductive polymer according to the invention which has been platinized on both sides, i.e. has been coated with very small platinum particles (cf. M.S. Wilson & S. Gottesfeld, (Electronics Research Group, Los Alamos National Laboratory, USA), Thin-film Catalyst Layers for Polymer Electrolyte Fuel Cells, *Journal of Applied Electrochemistry*, 22 (1992) 1-7). The whole system is enclosed in a casing, and hydrogen or a hydrogen-containing

gas (or methane) is supplied to the anode side of the membrane, while oxygen or an oxygen-containing gas is supplied to the cathode side of the membrane.

The manner in which the polymers of the invention are prepared as well as the procedures for producing single ion-conductive membranes containing an ion-polymer complex of the invention will be illustrated in more detail in the following, non-limiting examples.

All the reactions were carried out in dry, O<sub>2</sub>-free solvents and under a dry, inert atmosphere (N<sub>2</sub> or Ar).


Example 1. The synthesis of:

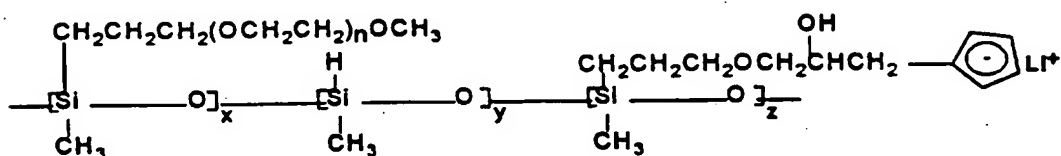

A tetrahydrofuran solution (40 ml) of polymethyl hydrosiloxane (1.18 g,  $5.2 \cdot 10^{-4}$  mole (PS 120)), polyethyleneglycol allyl methyl diether (2.12 g,  $5.4 \cdot 10^{-3}$  mole (MW = 391)) and allyl glycidyl ether (0.45 g,  $3.9 \cdot 10^{-3}$  mole) was placed in a 50 ml Erlenmeyer flask. The reaction was catalyzed by adding 7.5  $\mu\text{l}$  platinum-divinyltetramethyldisiloxan complex to the solution with a microsyringe<sup>(2)</sup>. The mixture was stirred for 72 hours followed by addition of lithium cyclopentadienylide (0.22 g,  $3.0 \cdot 10^{-3}$  mole, corresponding to a EO/Li<sup>+</sup> ratio of approximately 15. The solution was stirred for another 24 hours and cast on a glass plate. After the evaporation of the solvent


the resulting polymer membrane (thickness approx. 0.25 mm) was dried at high vacuum. The conductivity of the complex was tested by means of a Solartron 1260 AC conductivity meter and was found to be  $1.1 \cdot 10^{-5} \text{ S cm}^{-1}$  at room temperature.

5 Example 2. The synthesis of:

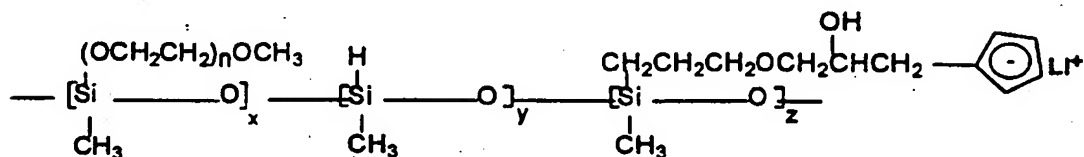


A tetrahydrofuran solution (40 ml) of polymethyl hydrosiloxane (1.25 g,  $5.5 \cdot 10^{-4}$  mole (PS 120)) and polyethylene-glycol 350 monomethyl ether (2.20 g,  $6.3 \cdot 10^{-3}$  mole) was placed in a 50 ml Erlenmeyer flask. The reaction was cata-  
 10 lyzed by adding 25 mg of zinc octoate to the solution<sup>(2)</sup>. The mixture was stirred for 24 hours followed by addition of allyl glycidyl ether (0.39 g,  $3.4 \cdot 10^{-3}$  mole) and 5  $\mu\text{l}$  platinum divinyl tetramethyldisiloxan complex for catalyzing<sup>(2)</sup>.  
 The mixture was stirred for 48 hours followed by addition of  
 15 lithium cyclopentadienylide (0.16 g,  $2.3 \cdot 10^{-3}$  mole), corresponding to a EO/Li<sup>+</sup> ratio of approximately 20. The solution was stirred for another 24 hours, filtered and then cast on a glass plate. After the evaporation of the solvent the resulting polymer membrane (thickness approx. 0.25 mm) was dried  
 20 at high-vacuum. The conductivity of the complex was found to be  $1.3 \cdot 10^{-5} \text{ S cm}^{-1}$  at room temperature.

Example 3. The synthesis of:

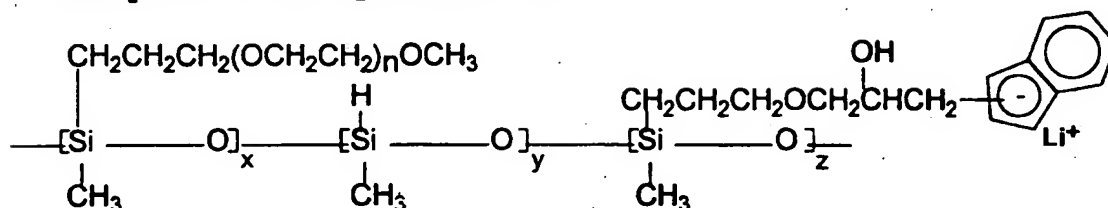

A tetrahydrofuran solution (40 ml) of polymethyl  
 hydrosiloxane (1.38 g,  $6.1 \cdot 10^{-4}$  mole (PS 120)),  
 polyethyleneglycol allyl methyl diether (2.92 g,  $7.5 \cdot 10^{-3}$   
 5 mole (MW = 391)) and allyl glycidyl ether (0.37 g,  $3.2 \cdot 10^{-3}$   
 mole) was placed in a 50 ml Erlenmeyer flask. The reaction  
 was catalyzed by adding 7.5  $\mu$ l platinum divinyl  
 tetramethyldisiloxan complex to the solution with a  
 microsyringe<sup>(2)</sup>. The mixture was stirred for 15 hours  
 10 followed by addition of lithium indenylide (0.33 g,  $2.7 \cdot 10^{-3}$   
 mole), corresponding to a EO/Li<sup>+</sup> ratio of approximately 20.  
 The solution was stirred for another 8 hours, filtered and  
 cast on a glass plate. After the evaporation of the solvent  
 the resulting polymer membrane (thickness approx. 0.25 mm)  
 15 was dried at high vacuum. The complex was purple and the  
 conductivity was found to be  $1.9 \cdot 10^{-6}$  S cm<sup>-1</sup> at room  
 temperature.

Example 4. The synthesis of:

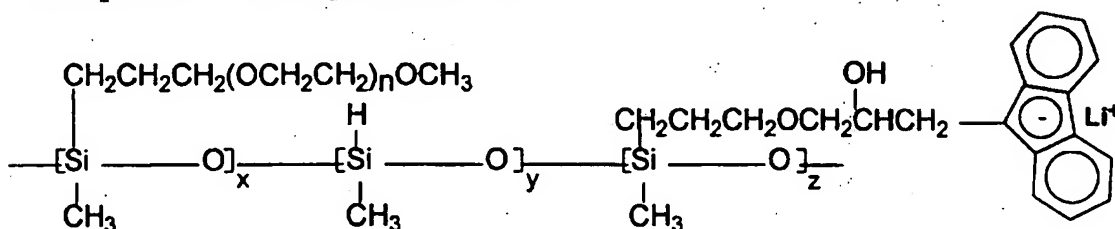


A tetrahydrofuran solution (40 ml) of polymethyl  
 20 hydrosiloxane (1.35 g,  $5.9 \cdot 10^{-4}$  mole (PS 120)),  
 polyethyleneglycol allyl methyl diether (2.84 g,  $7.3 \cdot 10^{-3}$   
 mole (MW = 391)) and allyl glycidyl ether (0.36 g,  $3.2 \cdot 10^{-3}$   
 mole) was placed in a 50 ml Erlenmeyer flask. The reaction  
 was catalyzed by adding 7.5  $\mu$ l platinum divinyl

tetramethyldisiloxan complex<sup>(2)</sup>. The mixture was stirred for 20 hours followed by addition of lithium fluorenylide (0.45 g,  $2.6 \cdot 10^{-3}$  mole (9-lithiumfluorene)), corresponding to a EO/Li<sup>+</sup> ratio of approximately 20. The solution was stirred for another 7 hours, filtered and then cast on a glass plate. After evaporation of the solvent the resulting polymer was a viscous purple liquid.

Complexes made as described above, containing mixed salt mixtures of lithium cyclopentadienylide (example 1) and lithium fluorenylide, were solid complexes. The result of conductivity measurements of complexes containing 20-80 mole % (of total salt content) lithium fluorenylide (LiFl) is shown on the following table. The conductivity is obviously decreasing with increasing lithium fluorene content.

% LiFl	Conductivity (S cm <sup>-1</sup> )
20	$1.0 \cdot 10^{-6}$
60	$7.4 \cdot 10^{-7}$
80	$4.7 \cdot 10^{-7}$


Example 5. The synthesis of

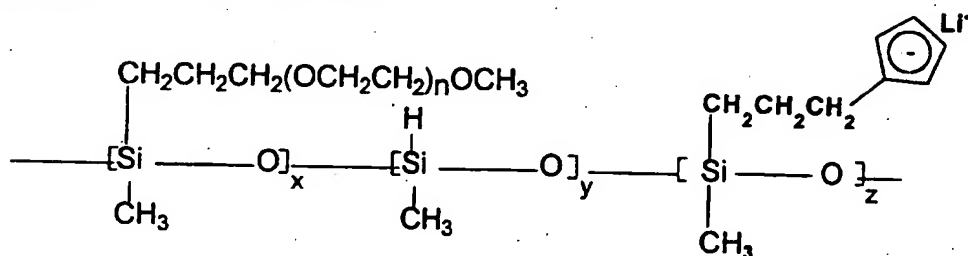

9.5 g polymethyl hydrosiloxane ( $4.2 \cdot 10^{-3}$  mole (PS 120)) and 20.1 g polyethyleneglycol allyl methyl diether ( $4.8 \cdot 10^{-2}$  mole (MW = 415)) was dissolved in approximately 70 ml tetrahydrofuran in a 100 ml volumetric flask. A reaction between the components was catalyzed by adding 25  $\mu\text{l}$  platinum divinyl tetramethyldisiloxan complex to the solution with a microsyringe<sup>(2)</sup>. The mixture was stirred for 5 hours and then diluted to 100.0 ml. (PMHS/PEG - matrix solution)

A polymer membrane with a EO/Li<sup>+</sup> ratio of approximately 10 was prepared as follows: 15.0 ml of the PMHS/PEG - matrix solution was placed in a 50 ml Erlenmeyer flask followed by addition of  $5.7 \cdot 10^{-3}$  mole of lithiumallyl-cyclopentadienylide dissolved in 7 ml of tetrahydrofuran. The solution was diluted to approximately 30 ml, stirred for 15 hours, diluted again to approximately 40 ml, filtered and cast on a glass plate. After evaporation of the solvent the resulting polymer membrane (thickness approx. 0.25 mm) was dried at high vacuum. The complex was brown and waxy. The conductivity was found to be  $2.7 \cdot 10^{-5}$  S cm<sup>-1</sup> at room temperature.

Example 6. The synthesis of:

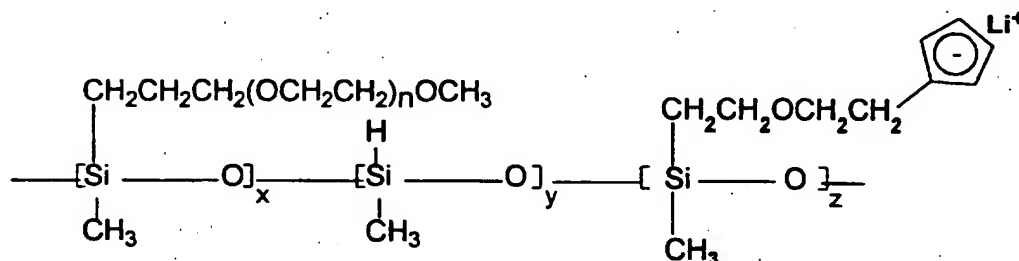


23.7 g polymethyl hydrosiloxane ( $1.0 \cdot 10^{-2}$  mole (PS 120)) and 50.1 g polyethyleneglycol allyl methyl diether (0.121 mole (MW = 415)) was dissolved in approximately 150 ml tetrahydrofuran in a 250 ml volumetric flask. A reaction between the components was catalyzed by adding 100  $\mu$ l platinum divinyl tetramethyldisiloxan complex to the solution with a microsyringe<sup>(2)</sup>. The mixture was stirred for 15 hours and then diluted to 250.0 ml. (PMHS/PEG - matrix solution)

15.0 ml of the PMHS/PEG - matrix solution was placed in a 50 ml Erlenmeyer flask. The polymer was crosslinked by addition of 0.12 g polyethyleneglycol diallyl ether dissolved in 1.0 ml tetrahydrofuran ( $4.4 \cdot 10^{-4}$  mole (MW = 282)). After stirring for 4 hours, approximately  $3.9 \cdot 10^{-3}$  mole of 2-(lithium cyclopentadienylide)ethyl-vinyl ether suspended in 8.3 ml tetrahydrofuran was added to the mixture, corresponding to a EO/Li<sup>+</sup> ratio close to 15. The solution was diluted to approximately 40 ml, stirred for 15 hours,



filtered and cast on a glass plate. After evaporation of the solvent the resulting polymer membrane (thickness approx. 0.25 mm) was dried at high vacuum. The complex was brown and the conductivity was found to be  $3.3 \cdot 10^{-6} \text{ S cm}^{-1}$  at room temperature.

Example 7. The synthesis of:

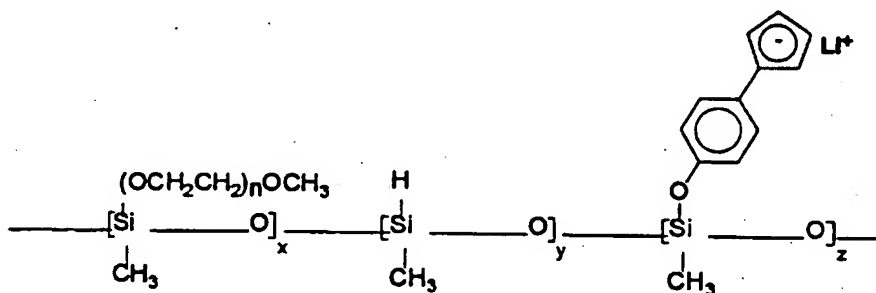


A 40 g sample of polymethyl hydrosiloxane ( $1.8 \cdot 10^{-2}$  mole (PS 120)) was mixed with 70 g of polyethyleneglycol 350 mono-methyl ether (0.20 mole) and 10 g phenol (0.11 mole). The mixture was dissolved in 300 ml tetrahydrofuran and placed in a 0.5 l three-necked flask. The reaction was catalyzed by adding 100 mg of zinc octoate to the solution<sup>(2)</sup> and the mixture was stirred at room temperature for 72 hours. The polymer was lithiated by addition of 40 ml N,N,N',N'-tetramethylethylenediamine (TMEDA) and 20 ml of 10 M butyllithium solution<sup>(3,4,6)</sup>. The solution was refluxed overnight and then the solvent was removed a rotary evaporator. The resulting polymer (a yellow liquid) was washed three times with 100 ml of methylcyclohexane and dried at high vacuum (Yield 91.3 g (75%)).

A 26 g sample of the lithiated polymer was dissolved in 100 ml tetrahydrofuran. While the mixture was stirred and cooled in an ice bath, 2.5 ml of 2-cyclopentene-1-on was added<sup>(3)</sup>. The solution immediately became orange, but then slowly

turned deep red while being stirred for 100 hours. The solvent was removed on a rotary evaporator whereby the polymer precipitated as beads.

3 g of the beads were suspended in 75 ml of tetrahydrofuran by stirring for 24 hours. Then they were treated with 0.25 ml of 10 M butyllithium solution<sup>(3)</sup>, corresponding to a EO/Li<sup>+</sup> ratio of approximately 20. The suspension was cast on a glass plate and after the evaporation of the solvent the resulting polymer membrane was dried at high vacuum. The conductivity of the complex was found to be  $7.1 \cdot 10^{-6} \text{ S cm}^{-1}$  at room temperature.

Example 8. The synthesis of:

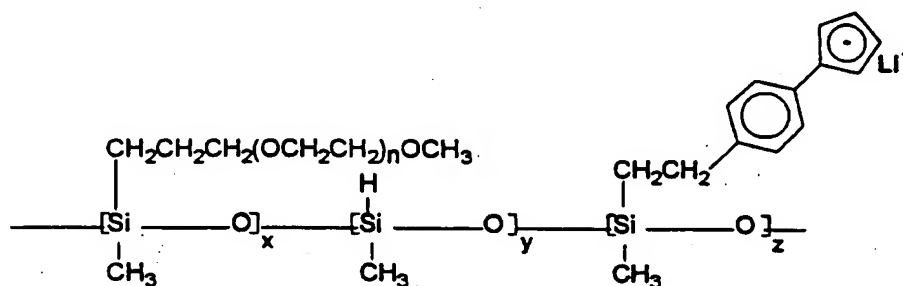


A 40 g sample of polymethyl hydrosiloxane ( $1.8 \cdot 10^{-2}$  mole (PS 120)) was mixed with 78 g of polyethyleneglycol allyl methyl diether (0.20 mole (MW = 391)) and 11 g freshly distilled styrene (0.11 mole). The mixture was dissolved in 300 ml tetrahydrofuran and placed in an 0.5 l three-necked flask. The reaction was catalyzed by adding 25  $\mu\text{l}$  platinum divinyl tetramethyldisiloxan complex to the solution<sup>(2)</sup>, and the mixture was stirred at room temperature for 72 hours. The polymer was lithiated by addition of 40 ml TMEDA and 20 ml of 10 M butyllithium solution<sup>(3,4,6)</sup>. The solution was refluxed overnight and then the solvent was removed by a rotary evaporator. The resulting polymer (a orange liquid) was washed

three times with 100 ml of methylcyclohexane and dried at high vacuum. (Yield 109.9 g (82%)).

A 28 g sample of the lithiated polymer was dissolved in 100 ml tetrahydrofuran. While the mixture was stirred and cooled in an ice bath, 2.5 ml of 2-cyclopentene-1-on was added<sup>(3)</sup>. The solution immediately became red, but then slowly turned brown while being stirred for 100 hours. The solvent was removed on a rotary evaporator whereby the polymer precipitated as beads.

4 g of the beads were suspended in 75 ml of tetrahydrofuran by stirring for 24 hours. Then they were treated with 0.30 ml of 10 M butyllithium solution<sup>(3)</sup>, corresponding to a EO/Li<sup>+</sup> ratio of approximately 20. The suspension was cast on a glass plate, and after the evaporation of the solvent the resulting polymer membrane was dried at high vacuum. The conductivity of the complex was found to be  $9.1 \cdot 10^{-6} \text{ S cm}^{-1}$  at room temperature.

Example 9. The synthesis of:




1.04 g ( $1.4 \cdot 10^{-2}$  mole) lithium cyclopentadienylide was weighed in a 100 ml volumetric flask and dissolved in approximately 50 ml tetrahydrofuran, followed by addition of 4.87 g ( $7.6 \cdot 10^{-3}$  mole) poly(propylene oxide)diglycidyl ether. The mixture was stirred for 24 hours and then diluted to 100.0 ml. (PPO solution)

A solution containing 0.74 g of polymethyl hydrosiloxane ( $3.3 \cdot 10^{-4}$  mole (PS 120)), 2.70 g polyethyleneglycol allyl methyl diether ( $4.6 \cdot 10^{-3}$  mole (MW = 591)) and allyl glycidyl ether (0.13 g,  $1.1 \cdot 10^{-3}$  mole) in tetrahydrofuran was prepared in a 50 ml Erlenmeyer flask. A reaction between

the existing carbon-carbon double bonds and the silicon-hydrogen bonds was catalyzed by adding 5.0  $\mu$ l platinum divinyl tetramethyldisiloxan complex to the solution with a microsyringe<sup>(2)</sup>. The mixture was stirred for 15 hours followed by addition of 24 ml of the PPO solution, corresponding to a EO/Li<sup>+</sup> ratio of approximately 20. The solution was stirred for another 8 hours and cast on a glass plate. After evaporation of the solvent the resulting polymer membrane (thickness approx. 0.25 mm) was dried at high vacuum. The complex was red and seemed to be separated into two phases. The conductivity of the dominant phase was found to be  $5.4 \cdot 10^{-6} \text{ S cm}^{-1}$  at room temperature.

Example 10. The synthesis of:

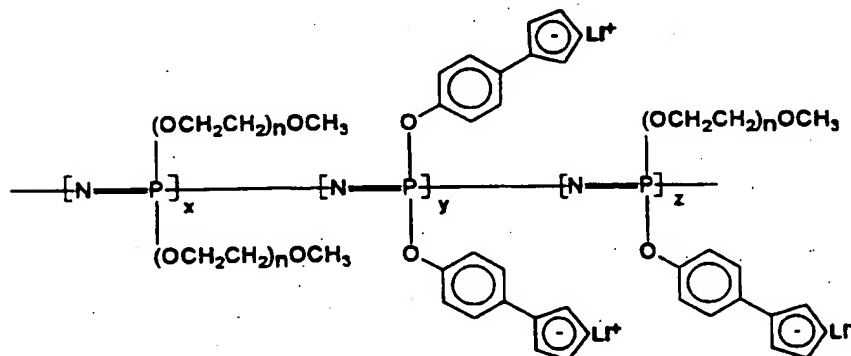


may be carried out in the following manner:

A 12.5 g sample of phosphoritrile chloride (Cl<sub>6</sub>N<sub>3</sub>P<sub>3</sub>) is polymerized by a ring opening polymerization at 250°C<sup>(7)</sup>. The resulting polydichlorophosphazene is dissolved in 300 ml tetrahydrofuran and is added over a 0.5 hour period to a stirred suspension of 27.4 g of the sodium salt of tri-ethyleneglycol monomethyl ether (polyoxyethylene-3-methyl-ether (0.15 mole)) and 0.53 g of the disodium salt of polyethylene glycol 200 ( $2.1 \cdot 10^{-3}$  mole) in 200 ml tetrahydrofuran in a 1.0 l three-necked flask. The reaction is carried out in the presence of tetra-n-butyl ammonium bromide to yield a fully substituted polymer<sup>(8)</sup>. The mixture is refluxed for

another 24 hours and then 7.7 g of the sodium salt of the phenol suspended in 100 ml tetrahydrofuran is added. The mixture is refluxed for another 24 hours and is then cooled to room temperature. The polymer is recovered by precipitation into heptane.

The resulting polymer is then lithiated, grafted with cyclopentadiene and complexed in the same manner as described in examples 7 and 8.

Example 11. The synthesis of:

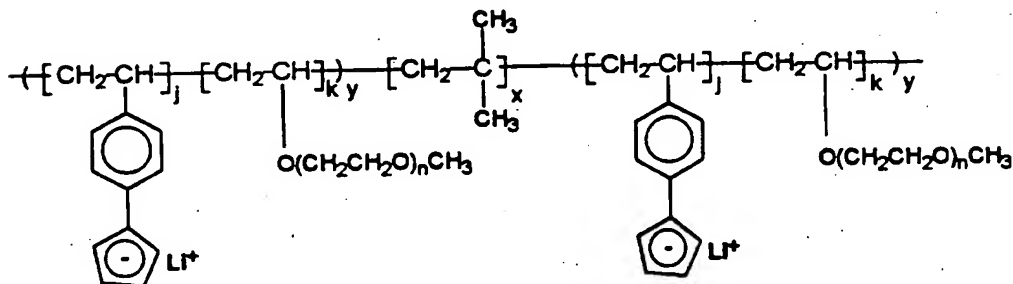

may be carried out in the following manner:


A polymer of the PVE-type, polyalkane, polystyrene or a combination thereof in a random copolymer or block-copolymer is prepared by living carbocationic polymerization with 1,3-di-(2-methoxy-2-propyl)-5-tert-butylbenzene as an initiator, with titanium<sup>(IV)</sup> chloride as coinitiator. An ideal solvent system may be a 40:60 (v/v) mixture of methylcyclohexane and dichloromethane<sup>(12,13,14)</sup>. The polymerization is carried out at -78°C, in a cooling bath consisting of isopropyl alcohol mixed with dry ice. A proton trap such as 2,6-di-tert-butylpyridine and an electron donor such as DMA may optionally be applied. The resulting polymer is rinsed for homopolymers by soxhlet extraction with ethyl methyl ketone as an eluent. The apparent average molecular weight of the purified polymer may be measured by Gel Permeation Chromatography (GPC) with poly-

isobutylene, polystyrene and/or poly(ethylene glycol) standards, depending on the actual composition<sup>(12,13,14)</sup>.

A block-copolymer consisting of a middle-block of polyisobutylene and random end-blocks of polystyrene-co-poly-  
 5 (ethylene glycol) methyl vinyl diether is prepared by living carbocationic polymerization in the said system, by preparing a solution of the initiator, proton trap, and isobutylene according to the art. The polymerization is turned on by adding a solution of the coinitiator to the system. After a  
 10 while (typically 1-5 hours) the electron donor is added, followed by addition of a solution of poly(ethylene glycol) methyl vinyl diether and styrene. The polymerization is quenched with methanol after another 2-3 hours<sup>(12,14)</sup>.

The polymer is then lithiated, grafted with cyclopentadiene  
 15 and complexed in the same manner as described in examples 7 and 8.

Example 12. The synthesis of:

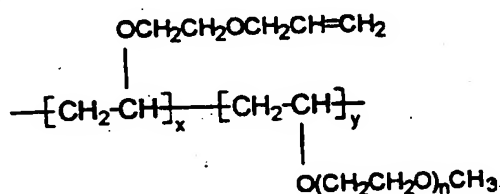


may be carried out in the following manner:

A random copolymer of poly(ethylene glycol) methyl vinyl  
 20 diether and ethylene glycol allyl diether (allylated PVE)<sup>(15,16)</sup> is prepared by living carbocationic polymerization, in the same system as described in example 11, by preparing a solution of the initiator, proton trap, and the

said monomers according to the art. The polymerization is turned on by adding a solution of the coinitiator to the system. After typically 1-5 hours, the polymerization is quenched with methanol<sup>(12,13,14)</sup>.

- 5 The ion-conductivity may be gained by mixing the resulting copolymer with a polymer containing an ion complex of the invention, such as a poly(methyl hydrosiloxane) derivative (examples 1 and 2). In this case a crosslinking reaction occurs between the Si-H bond in the poly(methyl hydro-
- 10 siloxane) and the double bond in the allylated PVE.

Example 13. The synthesis of:

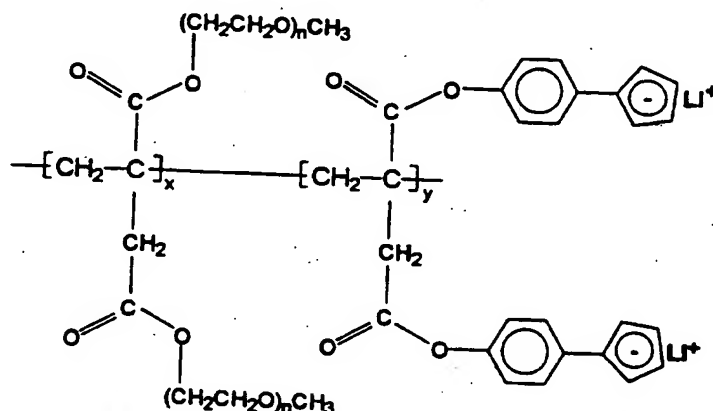

may be carried out in the following manner:

- Itaconate ester monomers may be prepared by acid catalyzed esterification of itaconic acid with the appropriate starting
- 15 alcohol using p-toluene sulfonic acid as catalyst and toluene as solvent at reflux temperature. Alcohols such as poly-
- ethylene glycol 350 monomethyl ether, triethylene glycol monomethyl ether and phenol, may be used for the monomer
- synthesis. The corresponding itaconates are di-ethoxy(7,2)-
- 20 methyl itaconate, di-ethoxy(3)-methyl itaconate and diphenyl itaconate. Unreacted alcohol is removed by washing the toluene solution several times with water. The required monomer may then be obtained by drying the toluene solution

with magnesium sulphate, followed by azeotropic distillation<sup>(17,18,19,20)</sup>.

5 A mixture of di-ethoxy(7,2)-methyl itaconate, di-ethoxy(3)-methyl itaconate and diphenyl itaconate is placed in a 0.5 l flask. The monomers are polymerized using  $\alpha,\alpha'$ -azabisobutyronitrile as initiator by heating the system at 340K for one week. The resulting polymer is dissolved in chloroform, precipitated from diethyl ether and dried for 24 hours in vacuo<sup>(17,18,19,20)</sup>.

10 The polymer may then be lithiated, grafted with cyclopentadiene and complexed in the same manner as described in examples 7 and 8, with carefully purified and dried dichloromethane as solvent.

15 In the case of  $y = 0$ , ion-conductivity may be gained by mixing the resulting poly(poly(ethylene glycol) monomethyl ether) itaconate with a polymer containing an ion complex of the invention, such as a poly(methyl hydrosiloxane) derivative (example 1 and 2).



## References


- 1 Gray, F.M.: "Solid Polymer Electrolytes - Fundamentals and Technological Applications", VHC Publishers Inc. 1991.
- 5 2 Anderson, R., Arkles, B., and Larson, G.L.: "Silicon Compounds - Register and Review", Petrarch Systems Inc. 1987.
- 3 Bonds, W.D., Brubaker, Jr., C.H., Chandrasekaran, E.S., Gibbons, R.H. and Kroll, L.C.: "Polystyrene Attached  
10 Titanocene Species - Preparation and Reactions", J. Am. Chem. Soc. 97(8), 2128 (1975).
- 4 Fyles, T.M. and Leznoff, C.C.: "The Use of Polymer Supports in Organic Chemistry V. The Preparation of Monoacetates of Symmetrical Diols", Can. J. Chem. 54,  
15 935 (1976).
- 5 Grubbs, R.H. and Shiu.Chin, H. Su: " The Preparation of Polymeric Organophosphorous Ligands for Catalyst Attachment", J. Organom. Chem. 122, 151 (1976).
- 6 Broadus, C.D.: "Homogenous Metalation of  
20 Alkylbenzenes", J. Org. Chem. 35, 10 (1970).
- 7 Allcock, H.R., Austin, P.E., Neenen, T.X., Sisko, J.T., Blonsky, P.M. and Shriver, D.F.: " Polyphosphazenes with Etheric Side Groups: Prospective Biomedical and Solid Electrolyte Polymers", Macromolecules 19, 1508 (1986).
- 25 8 Blonsky, J.T. and Shriver, D.F: "Polyphosphazenes Solid Electrolytes", J. Am. Chem. Soc. 106, 6854 (1986).
- 9 Tonge, J.S. and Shriver, D.F.: "Increased Dimensional Stability in Ionically Conducting Polyphosphazenes systems", J. Electrochem. Soc. 134, 269 (1984).

- 10      Feldstedt, J.: " Syntese og Karakterisering af  
Solventfrie Elektrolytter", DTH Kemisk Lab. A, Denmark  
1991.
- 5      11      Skotheim, T.A., Yoshiyuki, O. and Hung Sui, L.: European  
Patent Application Publ. No. 0376466.
- 12      Kennedy, J.P. and Iván, B.: "Designed Polymers by  
Carbocationic Macromolecular Engineering: Theory and  
Practice.", Hanser Publishers, 1992.
- 10      13      Wang, B., Mishra, M.K. and Kennedy, J.P.: "Living  
Carbocationic Polymerization. XII. Telechelic  
Polyisobutylenes by a Sterically Hindered Bifunctional  
Initiator.", Polymer Bulletin 17, 205, (1987), Springer-  
Verlag 1987.
- 15      14      Gylfason, G.H.: "Polymerer med kontrolleret struktur",  
DTH Institut for kemiteknik, 1993.
- 15      15      Andrei, M., Marchese M. and Roggero A.: "Polymer  
Electrolytes Based on Crosslinked Siliated Poly-vinyl-  
ether and Lithium Perchlorate.", Solid State Ionics 72,  
140, (1994).
- 20      16      Pantaloni, S., Passerini, S., Croce, F. and Scrosati B.:  
"Electrochemical Characterization of a Class of Low  
Temperature Conducting Polymer Electrolytes.",  
Electrochimica Acta 34/5, 635, (1989).
- 25      17      Cowie, J.M.G., Ferguson, R.: "Glass and Subglass  
Transitions in a Series of Poly(itaconate ester)s with  
Methyl-Terminated Poly(ethylene oxide) Side Chains.", J.  
Polymer Science, Polymer Physics Ed. 23, 2181, (1985).
- 30      18      Cowie, J.M.G. and Martin, A.C.S.: "Ionic Conductivity of  
Poly(diethoxy(3)methyl itaconate) Containing Lithium  
Perchlorate.", Polymer Communications 26, 298, (1985).


- 19 Cowie, J.M.G. and Martin, A.C.S.: "Glass Transition in Poly(di-(polypropylene glycol)itaconate)-Salt Mixtures.", Polymer Communications 28, 130, (1987).
- 5 20 Cowie, J.M.G. and Martin, A.C.S.: "Ionic Conductivity of Poly(di-(polypropylene glycol)itaconate)-Salt Mixtures.", Polymers 28, 627, (1987).

## CLAIMS


1. An ion-conductive polymer containing covalently bound ion complexes of one of the formulas Ia-Ic



Ia



Ib



Ic

5 wherein

$M^+$  is  $H^+$ ,  $Li^+$ ,  $Na^+$ , or  $K^+$ ;

$m$  is an integer in the range 0-4;

$m'$  is an integer in the range 0-7;

$m''$  is an integer in the range 0-8; and

10 each group R independently is  
halogen;

a group  $-CO-O^-$ ,  $-CO-O^-, M^+$ , or  $-SO_2-O^-, M^+$  wherein  $M^+$  is as defined above;

cyano;

15 nitro;

$C_{1-5}$  alkoxy;

optionally substituted phenyl;

optionally substituted phenoxy;


a group  $-CONR^5R^6$  where  $R^5$  and  $R^6$  independently are  
20 hydrogen,  $C_{1-5}$  alkyl, optionally substituted

phenyl, phenylcarbonyl, or  $C_{1-6}$  alkanoyl;

a group  $-NR^5R^6$  where  $R^5$  and  $R^6$  independently are as defined above;

a group  $-N(R^5)-CO-R^7$  where  $R^5$  is as defined above,  
 and  $R^7$  is hydrogen,  $C_{1-5}$  alkyl,  $C_{2-5}$  alkenyl,  $C_{2-5}$   
 alkynyl, or optionally substituted phenyl;  
 a group  $R^7-CO-$ , a group  $R^7-O-CO-$ , a group  $R^7-CO-O-$ ,  
 5 or a group  $R^7-O-CO-O-$  where  $R^7$  is as defined above;  
 cycloheptatrienyl; or

one of the groups R is a ion complex Ia', Ib', or  
 Ic'

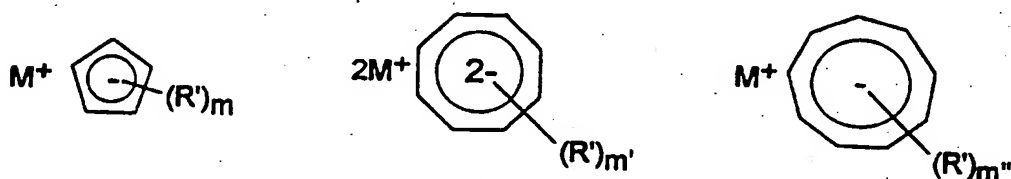

10

Ia'

Ib'

Ic'

wherein  $M^+$ , m,  $m'$  and  $m''$  are as defined above, and  
 $R'$  has the same meanings as R defined above with  
 the proviso that  $R'$  is not a ion complex Ia', Ib',  
 or Ic'; or

15

two groups R bound to two adjacent carbon atoms may  
 together form

a divalent aliphatic or alicyclic group with  
 3-8 carbon atoms and having at least 2 C-C  
 double bonds;


20

carbonyloxycarbonyl;  
 carbonylthiocarbonyl;


a group  $-CO-N(R^7)-CO-$  where  $R^7$  is as defined  
 above;

and the free bond indicated by "a", either directly or through an intervening group, is bound to the polymer backbone.

2. A polymer according to claim 1 in which a divalent  
5 aliphatic or alicyclic group formed by two groups R bound to two adjacent carbon atoms is selected from 1,3-propenylene, 1- or 2-buten-1,4-ylene, 1,3-butadien-1,4-ylene, 1,3-pentadien-1,5-ylene, 5-methyl-1,3-pentadien-1,5-ylene, 3-methyl-1,4-pentadien-1,5-ylene, 5-methylidene-1,3-pentadien-  
10 1,5-ylene, a group of the formula




and a group of the formula




where "a" indicate the free bonds to two adjacent carbon atoms.

3. A polymer as claimed in claim 1 or 2 which has a glass  
15 transition temperature  $T_g$  below 273°K.


4. A polymer as claimed in claim 3 where the glass transition temperature  $T_g$  below  $263^\circ\text{K}$ , preferably below  $253^\circ\text{K}$ , in particular below  $243^\circ\text{K}$ , especially below  $233^\circ\text{K}$ , such as below  $223^\circ\text{K}$ .
5. A polymer as claimed in any of claims 1-4 which further comprises sequences of the formula  $-(\text{CH}(\text{Y})-\text{CH}_2-\text{O})_n-$  where  $n$  is an integer in the range of 2-30, preferably 3-10, and each  $\text{Y}$  independently is hydrogen or methyl, said sequences being present either in the backbone of the polymer or in grafted side groups or in the intervening group.
6. A polymer as claimed in claim 5 wherein the intervening group or grafted side groups comprise sequences of the formula  $-(\text{CH}(\text{Y})-\text{CH}_2-\text{O})_n-$ .
7. A polymer as claimed in any of claims 1-6 which comprises a backbone derived from polymer backbones of the following formulae II, III or IV



II



III



IV

20 wherein  $\text{X}$  is halogen;

- $R^{10}$  and  $R^{11}$  independently are hydrogen, alkyl with 1-3 carbon atoms, carboxy, carboxyalkyl with 1-3 carbon atoms, phenyl, a group  $-(OCH(Y)CH_2)_nOH$  or a group  $-(OCH(Y)CH_2)_nOR^{12}$  wherein Y is H or methyl, n is an integer in the range 2-30 and  $R^{12}$  is
- 5  $C_{1-3}$  alkyl; and
- y is an integer in the range from 3 to  $10^4$ , preferably from 3 to  $10^3$ , such as from 3 to 500.

8. A polymer as claimed in any of claims 1-7 where  $M^+$  is  $H^+$ ; m, m' and m'' are different from 0; the polymer contains
- 10 sequences of the formula  $-(CH(Y)-CH_2-O)_n-$  where Y is hydrogen or methyl, and n is an integer in the range of 2-30; the ion complex of formula Ia, Ib, or Ic further having a  $pK_a$  value of at the most 15, preferably at the most 10, in particular at the most 5, especially at the most 0.
- 15 9. An electrochemical battery comprising an electrolyte comprising a polymer as defined in any of claims 1-7.
10. A proton exchange membrane fuel cell comprising an electrolyte comprising a polymer as defined any of claims 1-8 wherein  $M^+$  is  $H^+$ .



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 95/00484

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H01B 1/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0581296 A2 (DOW CORNING TORAY SILICONE CO. LTD.), 2 February 1994 (02.02.94) --	1-10
A	US 5196484 A5 (JEREMY R.M. GILES ET AL), 23 March 1993 (23.03.93) --	1-10
A	Patent Abstracts of Japan, Vol 15, No 70, E-1035, abstract of JP, A, 2-291603 (HITACHI MAXELL LTD), 3 December 1990 (03.12.90) --	1-10
A	EP 0420253 A2 (DOW CORNING TORAY SILICONE COMPANY, LIMITED), 3 April 1991 (03.04.91) --	1-10

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

4 March 1996

Date of mailing of the international search report

05 -03- 1996

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Barbro Nilsson  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 95/00484

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0460876 A1 (DAI-ICHI KOGYO SEIYAKU CO., LTD.), 11 December 1991 (11.12.91) --	1-10
A	US 5350646 A (MICHEL ARMAND ET AL), 27 Sept 1994 (27.09.94) -- -----	1-10

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

05/02/96

International application No.  
PCT/DK 95/00484

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0581296	02/02/94	NONE	
US-A5- 5196484	23/03/93	EP-A- 0329675 GB-A- 2215726 JP-T- 2500279 WO-A- 8803154	30/08/89 27/09/89 01/02/90 05/05/88
EP-A2- 0420253	03/04/91	AU-B- 636165 AU-A- 6321990 CA-A- 2025863 JP-A- 3115359 US-A- 5112512	22/04/93 11/04/91 29/03/91 16/05/91 12/05/92
EP-A1- 0460876	11/12/91	CA-A- 2043461 DE-D- 69114049 JP-A- 4036347 KR-B- 9506143 US-A- 5159001	01/12/91 00/00/00 06/02/92 09/06/95 27/10/92
US-A- 5350646	27/09/94	AT-T- 128792 DE-D- 69205248 EP-A,B- 0531492 FR-A,B- 2673769 WO-A- 9216028 CA-A- 2087001 EP-A- 0551224 FR-A,B- 2686200 US-A- 5423069	15/10/95 00/00/00 17/03/93 11/09/92 17/09/92 11/07/93 14/07/93 16/07/93 06/06/95